



A CONTROL ROOM PLAN
 SCALE: 1/4" = 1'-0"
 FILE: M-0AM102


PROTECT IN PLACE NO 2 WATER PIPE. REMOVE ALL NO 2 PIPING BELOW CONTROL ROOM.

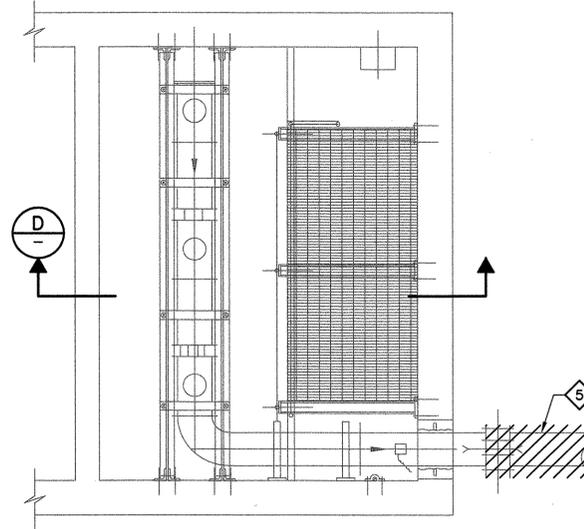

B OBSERVATION PLATFORM PLAN
 SCALE: 1/4" = 1'-0"
 FILE: M-0AM103

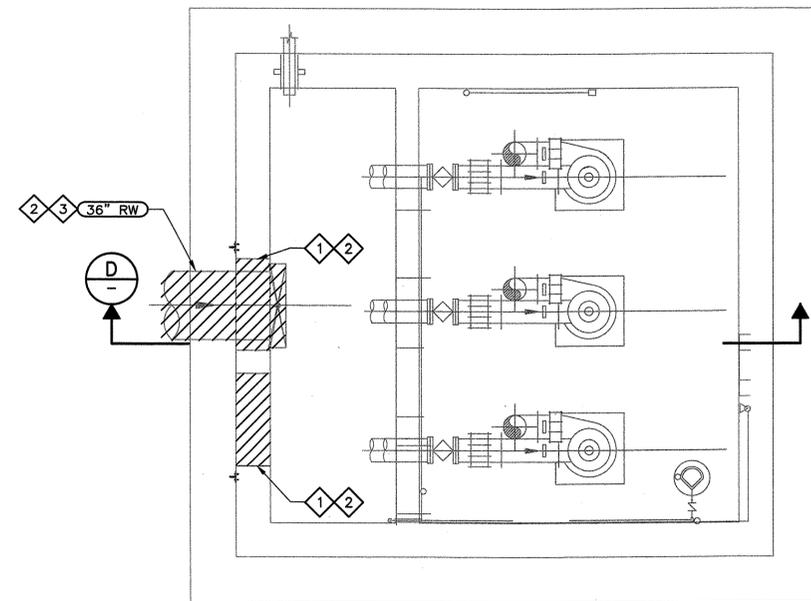

C PUMP ROOM PLAN
 SCALE: 1/4" = 1'-0"
 FILE: M-0AM104

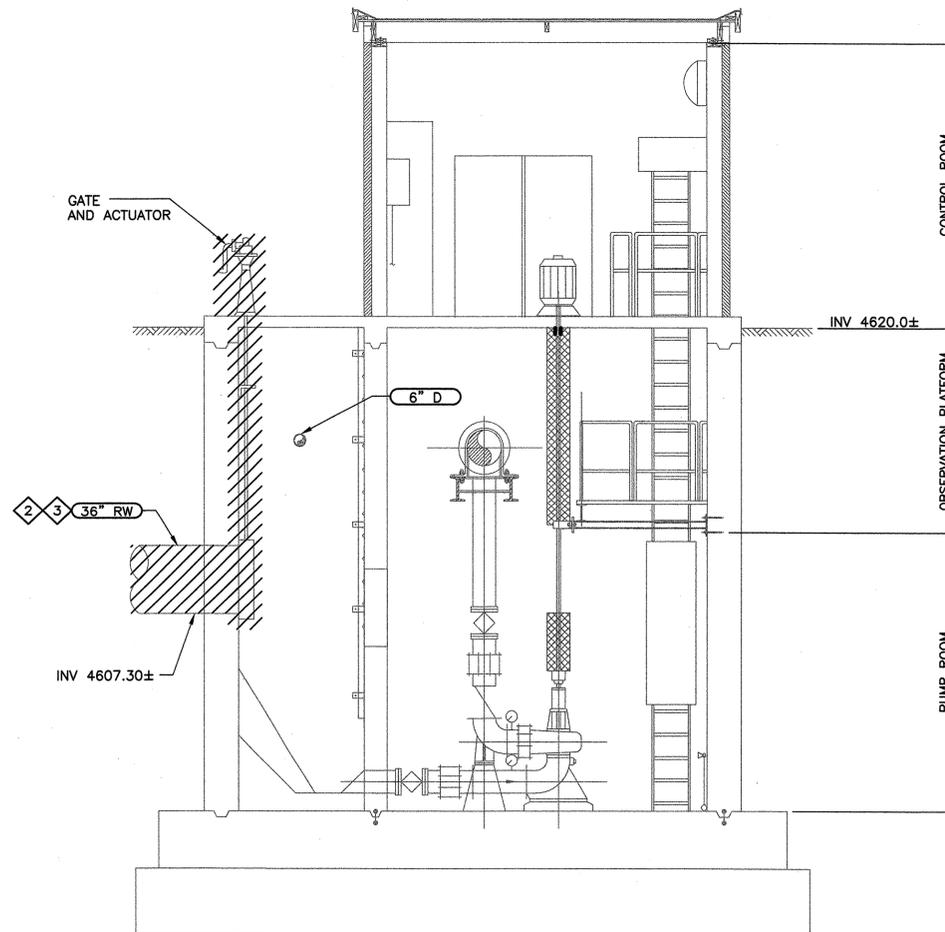

D SECTION
 SCALE: 1/4" = 1'-0"
 FILE: M-0AM201

GENERAL NOTES:

- SEE SPECIFICATION 01140 FOR WORK RESTRICTIONS.
- PROTECT EXISTING CONCRETE BEAMS & RETAINING WALL.
- FIELD VERIFY ALL DIMENSIONS & PIPING LOCATIONS.
- REMOVE & DISPOSE OF MECHANICAL EQUIPMENT, PIPING, & ACCESSORIES AS INDICATED.
- ALL EMBEDDED STEEL IN CONCRETE EXPOSED DURING DEMOLITION SHALL BE PROTECTED AGAINST EXPOSURE TO CORROSIVE ATMOSPHERE PER **TYP** SIM.
- FILL ALL PENETRATIONS FOR DEMOLISHED PIPING & CONDUIT WITH CLASS "C" CONCRETE.

KEYNOTES:

- SEE STRUCTURAL DRAWINGS FOR MODIFICATIONS.
- COORDINATE LIMITS OF DEMOLITION W/ STRUCTURAL, PROCESS & CIVIL DWGS.
- CUT PIPE FLUSH WITH WALL. FILL WITH CLASS "C" CONCRETE.
- NOT USED
- BID ALTERNATE "A" - DEMOLISH PIPING AS NEEDED.
- NOT USED
- REMOVE ALL PIPING & SUPPORTS.

VERIFY SCALES
 BAR IS ONE INCH ON ORIGINAL DRAWING
 0 1"


DESIGNED	D/JN
DRAWN	WRH
CHECKED	SKG
DATE	OCTOBER 2010




REV.	DATE	DESCRIPTION	BY	APPD

CARSON CITY PUBLIC WORKS
NORTH LIFT PUMP STATION IMPROVEMENTS
 CARSON CITY CIP NO. 5.0609
 PROCESS
NORTH LIFT PUMP STATION - DEMOLITION


DRAWING NO.	P-3
SHEET NO.	28 OF 55

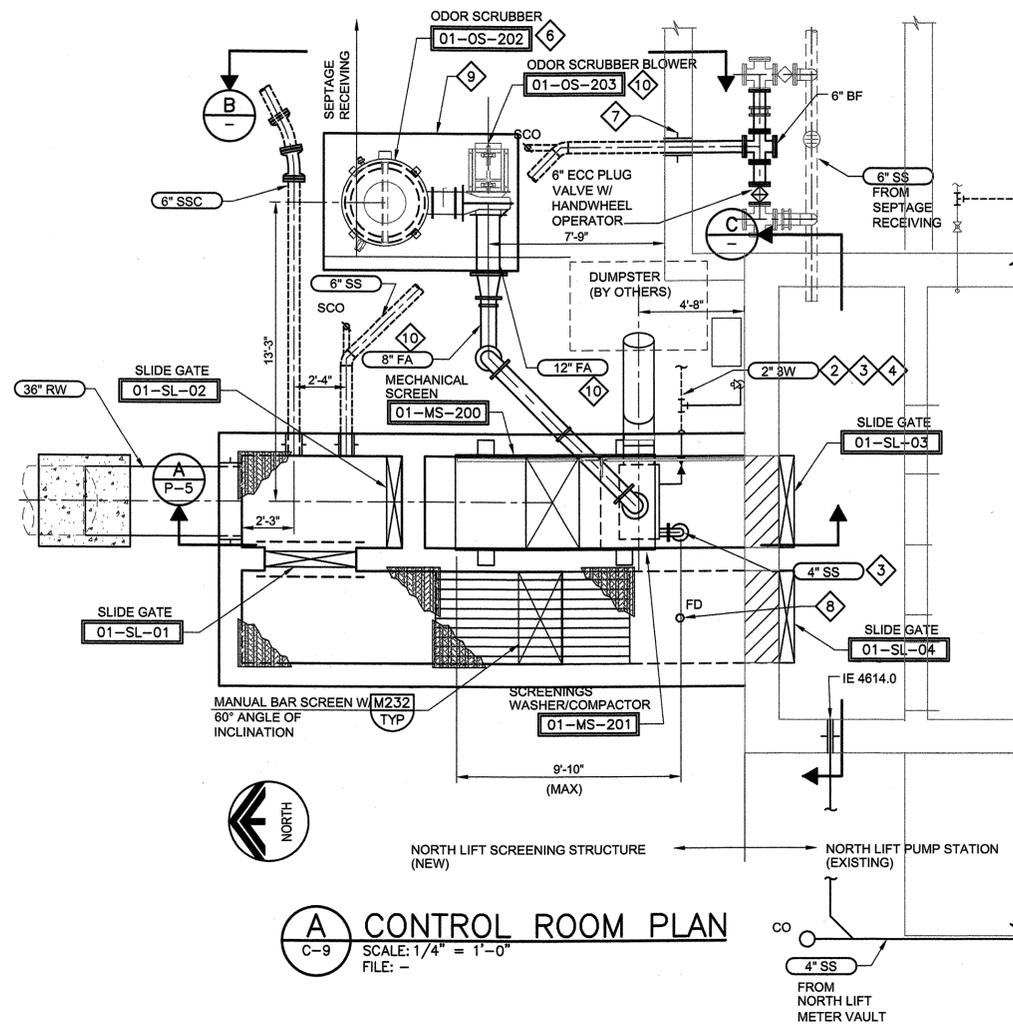


A CONTROL ROOM PLAN
 C-9 SCALE: 1/4" = 1'-0"
 FILE: -

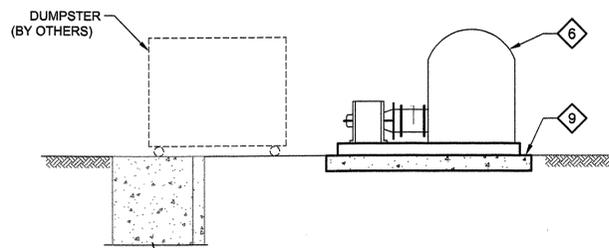

B SECTION
 SCALE: 1/4" = 1'-0"
 FILE: -

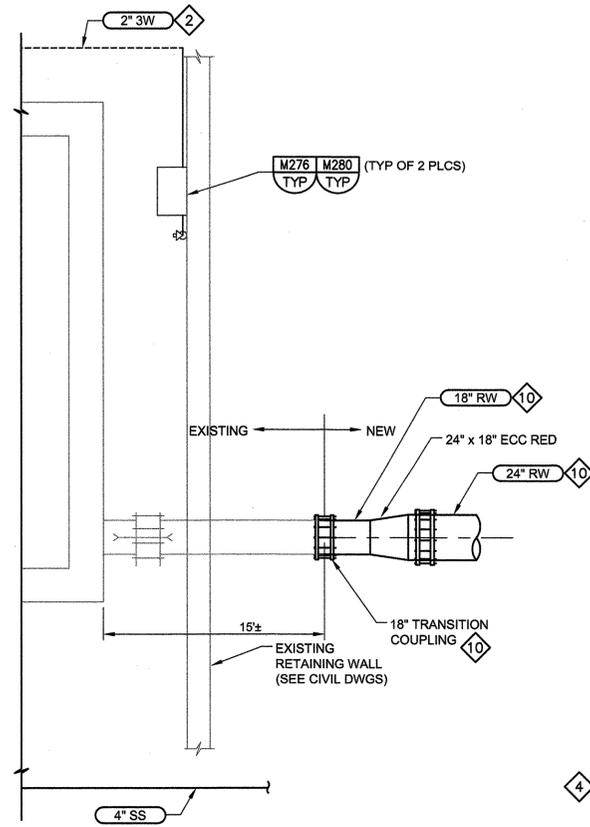

C SECTION
 SCALE: 1/4" = 1'-0"
 FILE: P-PSNP201

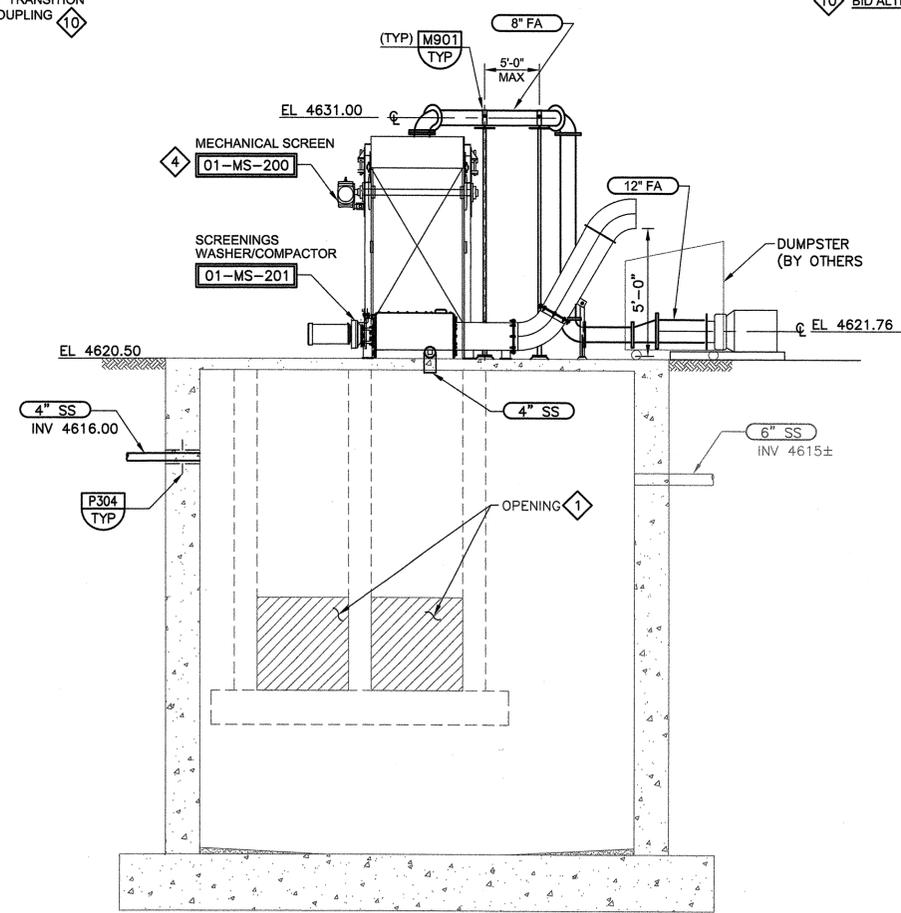

- NOTES:**
- SEE SPECIFICATION 01140 FOR WORK RESTRICTIONS.
 - SEE CIVIL DRAWINGS FOR YARD PIPING.
 - COAT ALL INTERIOR CONCRETE WITH EPOXY POLYMER SYSTEM PER SPEC 09960.

- KEY NOTES:**
- SEE STRUCTURAL DWGS FOR OPENINGS.
 - PROVIDE INSULATION & ALUMINUM SHIELD FOR EXPOSED PIPING.
 - COORDINATE EXACT LOCATION OF ALL PIPING CONNECTIONS WITH MANUFACTURER.
 - PROVIDE HEAT TRACING PER ELECTRICAL DWGS (SEE ALSO SPECIFICATIONS).
 - SEE CIVIL DRAWINGS FOR PIPE PROFILE.
 - PACKAGED ODOR SCRUBBER SYSTEM PER SPECIFICATION 11395.
 - CORE DRILL THRU EXISTING WALL, CONNECT TO EXISTING LINE & ROUTE SLOPE AT 1/4" PER FOOT.
 - DRAIN PER P410 TYP
 - PROVIDE 8'-6" x 6'-0" x 2'-6" CONCRETE EQUIPMENT PAD PER S306 TYP
 - BID ALTERNATE "A" - 24" RW AND METER VAULT.

VERIFY SCALES
 BAR IS ONE INCH ON ORIGINAL DRAWING
 0 1"
 IF NOT ONE INCH ON ORIGINAL DRAWING, VERIFY SCALES ACCORDINGLY

DESIGNED	DUN	DRAWN	WRH	CHECKED	SKG	DATE
						OCTOBER 2010



BY	APPD	DESCRIPTION	DATE	REV

CARSON CITY PUBLIC WORKS
NORTH LIFT PUMP STATION IMPROVEMENTS
 CARSON CITY CIP NO. 5.0609
 PROCESS
 NORTH LIFT PUMP STATION
 MODIFICATIONS - PLANS & SECTIONS

DRAWING NO.
P-4
 SHEET NO.
 29 OF 55

