

**CARSON CITY PURCHASING AND CONTRACTS**  
**201 North Carson Street, Suite 3**  
**Carson City, NV 89701**  
**775-283-7137/FAX 887-2107**

<http://www.carson.org/index.aspx?page=998>

**NOTICE TO CONTRACTORS**  
**BID #1415-028**  
**5<sup>th</sup> Street Pedestrian Improvements**  
**PWP # CC-2014-308**

August 26, 2014

**Addendum No. 2**

Below are responses to questions received by 8/25/2014:

1. *Is the curb and gutter and sidewalk shown with solid lines on the Perpendicular Curb Ramp Apex standard detail C-5.3.3 paid as ramp or as curb and gutter and sidewalk (please see the attachment)?*

See the "Perpendicular Curb Ramp Apex" on the following page for reference on how payment for Curb and Gutter, Sidewalk, and Curb Ramp are to be broken up.

2. *Sheet C4 of the plans shows an existing brick landscape island to be removed. What is it to be replaced with?*

The existing brick landscaping island in front of 1269 E. Fifth St. on sheet C4 is to be removed and the planter is to match the existing planter to the east with crushed rock.

3. *Sheet C5 of the plans shows existing sidewalk to be removed. What is it to be replaced with?*

The existing concrete on sheet C5 in front of 1405 and 1415 E. Fifth St is to be removed and filled with dirt to match the existing planter. The existing utility box is to be protected in place.

4. *Bid Item BP.11 is described as Construct Permanent AC Pavement Patch (4" AC on 6" Agg. Base) while the pavement patch detail (C-5.1.6) shows 5" minimum AC depth or match existing section whichever is greater. Is the intent to construct 4 on 6 regardless of the existing section?*

Please follow the pavement patch detail shown on sheet C7 of the plans which calls for 5" AC on 6" agg. base rather than the bid item description.


Bid Item BP.11 shall be replaced with "Construction Permanent AC Pavement Patch (**5" AC on 6"** Agg. Base)

SC 6.1.12 "Construct Permanent AC Pavement Patch (4" AC on 6" Ag. Base)" shall be replaced with "Construct Permanent AC Pavement Patch (**5" on 6"** Ag. Base)"

5. *If existing utility boxes / vaults / cans are damaged prior to start of work, will replacements be provided by the utility at no cost to the contractor?*

Yes, any boxes that need to be replaced rather than re-used due to damage prior to construction will be provided by the utility.

1/2" EXPANSION JOINT

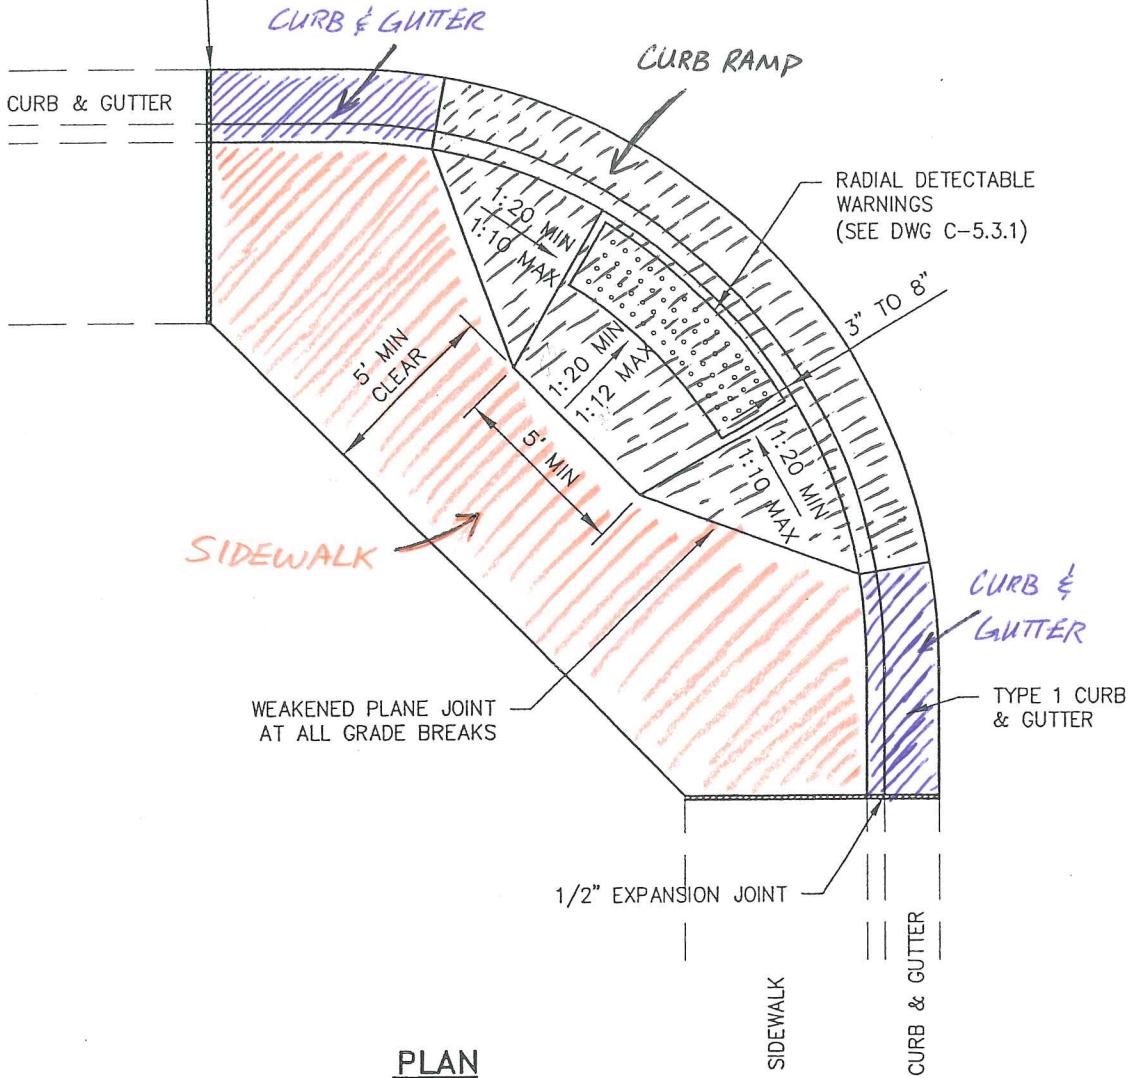

**PLAN**  
NTS

**NOTES:**

1. SEE "CURB RAMP GENERAL NOTES" DWG C-5.3.1 FOR FURTHER REQUIREMENTS.

NO.	REVISION	DATE	STANDARD DETAIL FOR PUBLIC WORKS CONSTRUCTION	SECTION CARSON CITY
			<b>PERPENDICULAR CURB RAMP APEX</b>	DRAWING NO. C-5.3.3
				DATE 7/2009
APPROVED BY:		7/09		