


**TYPICAL PROTECTION FOR INLET ON SUMP**  
NTS

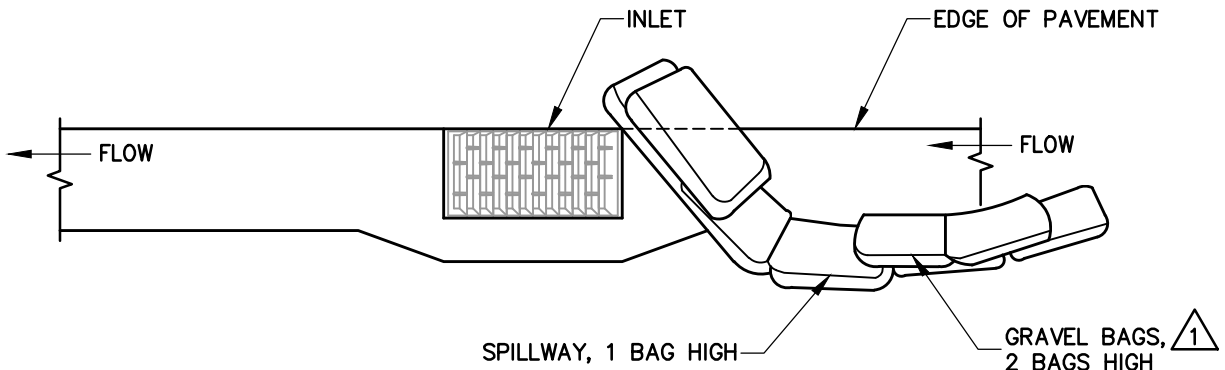

**TYPICAL PROTECTION FOR INLET ON GRADE**  
NTS

**NOTES:**

1. INTENDED FOR TEMPORARY SHORT-TERM USE.
2. USE TO MANAGE CURB WATER FLOW.
3. SEDIMENT CAPTURED BEHIND GRAVEL BAGS SHALL BE REMOVED WEEKLY DURING CONSTRUCTION.
4. INLET PROTECTION MUST BE PROPERLY MAINTAINED WHILE IN PLACE AND REMOVED WHEN REQUIREMENTS OF NDEP PERMIT HAVE BEEN MET.
5. GRAVEL BAGS SHALL BE FILLED WITH 3/8" - 3/4" WASHED ROCK.

2

NO.	REVISION	DATE	STANDARD DETAIL FOR PUBLIC WORKS CONSTRUCTION	SECTION
1	GRAVEL BAG	05/14	<b>STORM DRAIN INLET PROTECTION</b>	CARSON CITY
2	ROCK SIZE	9/17		DRAWING NO. C-4.1.7
APPROVED BY:		9/17		DATE SEP 2017